

Diaphragm Pumps for Air, Gases and Vapours

INNOVATIVE
TECHNOLOGY
WORLDWIDE



Serie LABOPORT® N 842.3 FT.18 Pump

LABOPORT® Chemically-resistant Diaphragm Vacuum Pump

Technical features:

- 100% oil-free transfer
- Pure transfer, evacuation and compression
- Highly compatible with vapours and condensation
- Chemically-resistant
- Therefore suitable for highly aggressive or corrosive gases and vapours
- Maintenance-free
- Environmentally friendly
- Gastight, leakage rate approx. 6×10^{-3} mbar x l/s, not tested in serial production.

The chemically-resistant serie N 842.3 diaphragm pump is a double-head, dry-running device used in a wide range of laboratory applications. These pump transfer and pump down without contamination.

The heart of this very compact pump is a KNF structured diaphragm. This patented diaphragm was stress-optimized using the Finite Elements method. As a result, we were able to make the pump smaller while increasing the service life of the diaphragm.

Technical data:

N 842.3 FT.18

Delivery (l/min) ¹⁾	34
Ultimate vacuum (mbar abs.)	2
operating pressure (bar g)	1
Connectors for tube (mm)	ID 10
Permissible gas and ambient temperature	+5...+40 °C
Mains	230V/50Hz
Motor protection	IP 44
Power P ₁	245 W
Operating current	1.5 A
Weight	13.4 kg
Dimensions	
LxHxW (mm)	341/223/167
With thermal switch and power fuse	

Motors with other voltages and frequencies on request.

¹⁾ at atm. pressure

Material in contact with the pumped media

Type/OrderNo.	Pump head	Diaphragm	Valves
N 842.3 FT.18	PTFE	PTFE-coated	FFPM

Spare parts

Description	Order No.
Spares kit	057359

Diaphragm Pumps for Air, Gases and Vapours


INNOVATIVE
TECHNOLOGY
WORLDWIDE

KNF NEUBERGER




Dimensions and performance characteristics

Pump down time for 10 l receiver

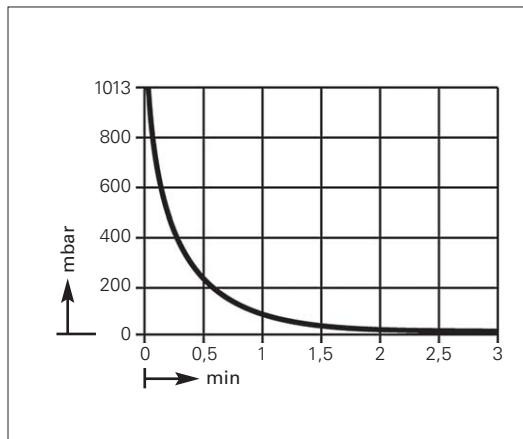

Performance characteristics

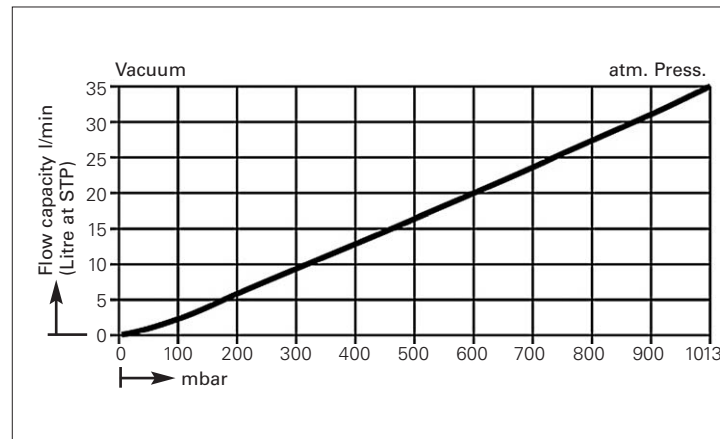

Dimensions (mm)

